RESIDENTIAL & COMMERCIAL IRRIGATION
Built on Innovation®



PGP® ROTOR

The World's Best Selling Rotor Since 1981.

The PGP is Hunter's original product—the item that put the company on the map. Its exceptional design and impressive performance consistently provide beautiful results in a variety of residential and light commercial settings. The PGP's engineered nozzles distribute water evenly, making this sprinkler unequaled in reliability, durability, versatility, and value. With its endless built-in features and Hunter's years of experience in gear-drive technology, it's no wonder the PGP remains the professional's choice year after year.

Learn more. Visit hunterindustries.com for more detailed information.

HUNTER PGP® THE WORLD'S MOST *Durable and Efficient Rotor*

Why Choose PGP?

- Pop-up sprinkler rotates silently then dissappears when the job is done
- Waters evenly and efficiently
- Has precise pattern control with no wasteful backsplash onto walkways or buildings
- Whisper-quiet rotation, without impact or clatter
- Through-the-top adjustment with helpful symbol makes it easy to adjust, wet or dry
- Easy fine-tuning without changing nozzles

Built to Last

- Integral rubber cover with membrane-covered sockets keeps dirt out
- Large dirty water screen puts an end to nozzle clogging



PGP-ADJ-B

PGP-ADJ Pop-up Rotary Sprinkler



Our pop-up sprinklers disappear when the job is done, providing a clean look and added safety.

Website hunterirrigation.com | **Customer Support** +1-760-752-6037 | **Technical Service** +1-760-591-7383

Helping our customers succeed is what drives us. While our passion for innovation and engineering is built into everything we do, it is our commitment to exceptional support that we hope will keep you in the Hunter family of customers for years to come.

© 2024 Hunter Industries™. Hunter, the Hunter logo, and all other trademarks are property of Hunter Industries, registered in the U.S. and other countries. Please recycle.

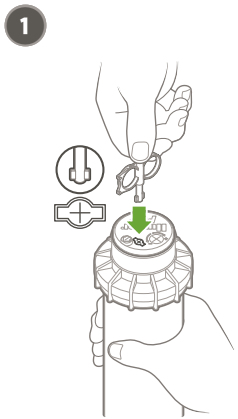
Denise Mullikin, President,
Landscape Irrigation and Outdoor Lighting

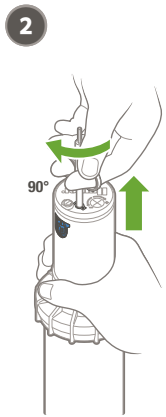
INT-142 BR EM N 12/24

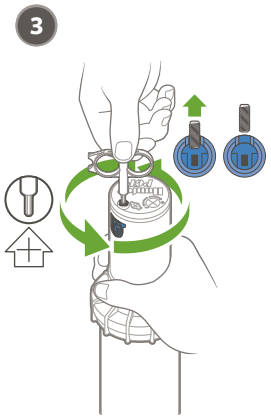


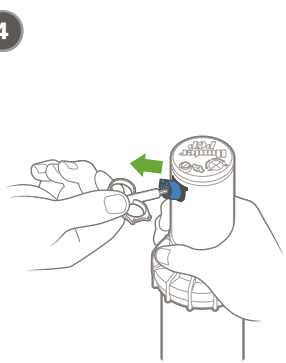
PGP-ADJ

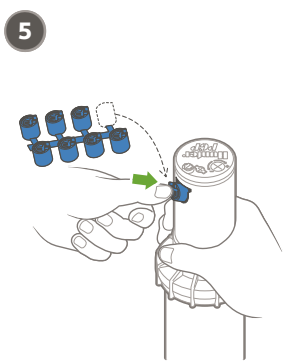


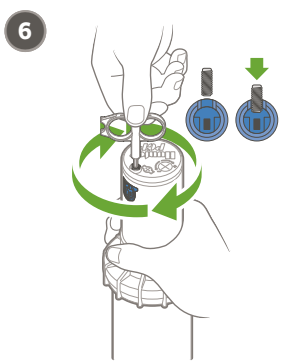


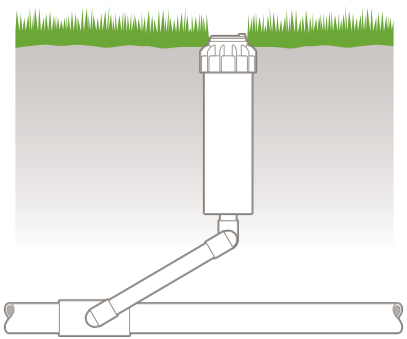


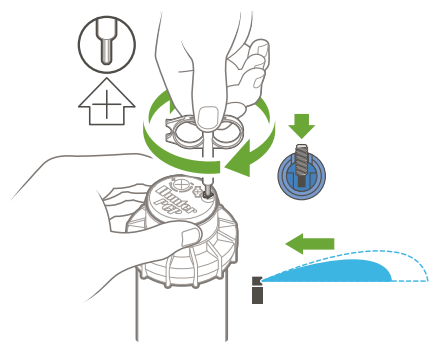


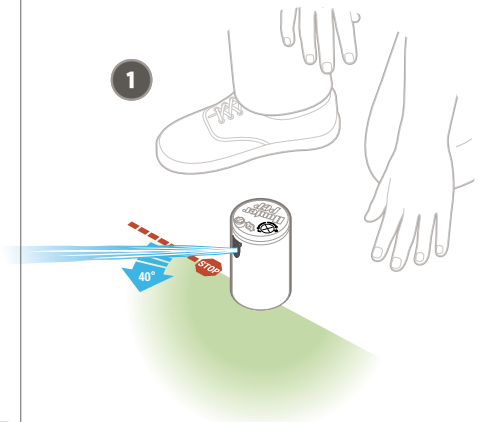








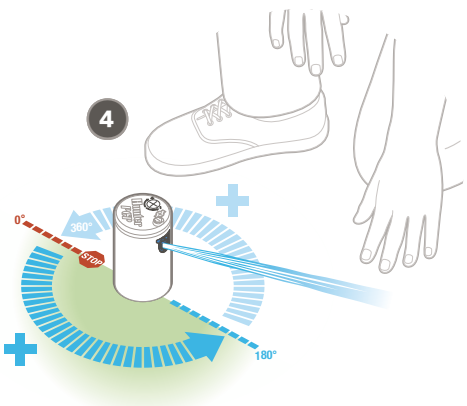



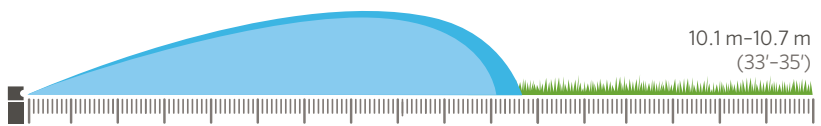
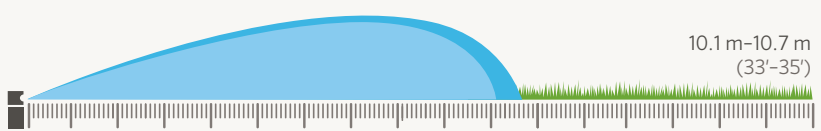
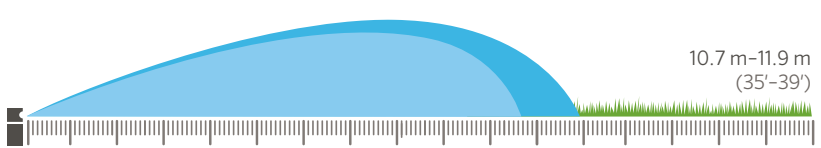


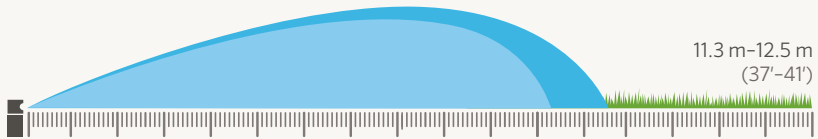
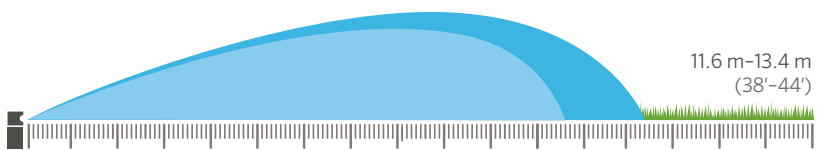
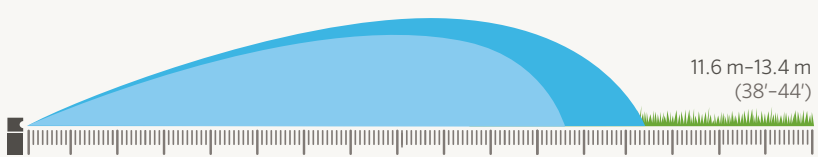

1
40°
STOP


2


3


4
0°
360°
STOP
180°

1.5	1.7–4.5 Bar 170–450 kPa 25–65 PSI	4.5–7.2 l/m 1.2–1.9 GPM	
2.0	1.7–4.5 Bar 170–450 kPa 25–65 PSI	5.4–8.8 l/m 1.4–2.3 GPM	
2.5	1.7–4.5 Bar 170–450 kPa 25–65 PSI	6.6–11.1 l/m 1.7–2.9 GPM	
3.0	1.7–4.5 Bar 170–450 kPa 25–65 PSI	8.4–14.0 l/m 2.2–3.7 GPM	

4.0	1.7–4.5 Bar 170–450 kPa 25–65 PSI	11.3–18.3 l/m 3.0–4.8 GPM	
5.0	1.7–4.5 Bar 170–450 kPa 25–65 PSI	14.0–23.4 l/m 3.7–6.2 GPM	
6.0	1.7–4.5 Bar 170–450 kPa 25–65 PSI	16.8–27.9 l/m 4.3–7.3 GPM	
8.0	1.7–4.5 Bar 170–450 kPa 25–65 PSI	22.5–36.9 l/m 6.0–9.8 GPM	